

*Portable high-bandwidth Data Recorder with extended recording time.  
Selectable 16/24-bit resolution for optimal dynamic range.  
Multiple channel configurations to address a wide range of applications.*

| Specification  |   |
|--|---|
| <b>Media</b>   |   |
| <b>RDX</b>   |   |
| Built-in 3.5-inch RDX drive x1                           | SATA interface                              |
| Compatible RDX cartridge types                           | HDD and SSD                                 |
| Recording capacities                                     | HDD : 500GB - 1TB / SSD : 64GB - 512GB      |
| Available cartridge                                      | Operation verified : Imation RDX cartridges |
|  | Imation                                     |
|  | 500GB RDX-500GB-IMN                         |
|  | 1TB RDX-1TB-IMN                             |
|  | docking station RDX-USB3-EXT-DOCK           |
| Media that has been verified to operate with this system | Tandberg Data                               |
|  | 500GB 8541                                  |
|  | 1TB 8586                                    |
|  | docking station RDXQuikStor                 |

| SDHC   |   |
|--|---|
| <b>SDHC card slot x1</b>                                 |   |
| Compatible media   | SDHC cards (SDXC not supported)                         |
| Recording capacity                                       | 4GB - 32GB  |
| Speed class  | Class 10 recommended                                    |
|  | SanDisk   |
|  | 4GB SDSDX-004G-J35                                      |
|  | 8GB SDSDU-008G-J35 / SDSDX-008G-J35 / SDSDX-008G-J95    |
| Media that has been verified to operate with this system | 16GB SDSDU-016G-J35 / SDSDX-016G-J35 / SDSDXPA-016G-J35 |
|  | 32GB SDSDXPA-032G-J35                                   |

| Analog signal input channels   |  |
|--|--|
| Input amplifier switching  | Can be switched between DC input and PA input  |
| Input signal type  | DC input PA input  |
| Number of input channels   | 16   |
| Input connectors   | BNC (Z=50Ω type)   |
| Input format   | Unbalanced   |
| Input impedance  | 1 MΩ or more   |
| Input signal and amplifier coupling  | DC coupling AC coupling  |
| Input range options  | ±0.1, 0.2, 0.5, 1, 2, 5, 10, 20V   |
| Input filter   | - Analog filter  |
| High pass filter   | - 3rd-order Butterworth analog filter<br>10 Hz (within ±0.5 dB),<br>20 Hz (within ±0.5 dB)   |
| Weighting  | - A curve, C curve or flat IEC-TYPE1   |
| Absolute maximum input volt-age (input range value)                                    | ±50V(0.1, 0.2, 0.5, 1, 2, 5V)<br>±100V(10, 20V)  |
| 2-color input level LED (red/green)  | Lights green when input level exceeds 10% of its input range and lights red when it exceeds 115%.<br>Lights green when input level exceeds 10% of its input range and lights red when it exceeds 115%.<br>Lights both green and red when there is no ICP current.  |
| Input signal quantization bit depth  | 24-bit or 16-bit switchable  |
| Over range   | ±127%(+2.08dB)   |
| Analog-digital conversion method   | ΔΣ method with 24-bit, 128x oversampling   |
| Input frequency flatness characteristics (0 dB at 100 Hz) (Sampling frequency / 2.4)   | 10V or less input range<br>Band (40kHz or less): ±0.5 dB or less<br>Band (80kHz or less): +0.5 to - 1.0 dB<br>20V input range<br>Band (20kHz or less): ±0.5 dB or less<br>Band (80kHz or less): +0.5 to - 2.5 dB   |
| Input range precision  | ±2% or less  |
| Nonlinearity   | ±0.1% or less  |
| Input DC drift stability   | ±0.1% or less<br>10 or more minutes after power supplied   |
| OFFSET, gain correction  | Correction function available  |
| Measured frequency of phase contrast between input channels (Sampling frequency / 2.4) | 10V or less input range<br>Band (20kHz or less): 1° or less (in same expansion unit)<br>2° or less (in different expansion unit)<br>Band (80kHz or less): 3° or less<br>20V input range<br>Band (20kHz or less): 2° or less (in same expansion unit)<br>3° or less (in different expansion unit)<br>Band (80kHz or less): 3° or less |

|                                    |   |   |
|------------------------------------|---|---|
| Voltage supplied to ICP sensors    | - | Can be set to 28V or 24V DC for each expansion unit (all 16 channels at once) |
| ICP sensor constant current source | - | Can be set to OFF, 0.5 mA or 4 mA per channel                                 |
| ICP sensor interruption detection  | - | Each channel has ICP sensor interruption detection                            |
| TEDS                               | - | Supports TEDS Ver. 1.1  |

| DC/PA input amplifier signal to noise (SN) ratio |                      |       |                      |       |                      |       |
|--|----------------------|-------|----------------------|-------|----------------------|-------|
| Input range                                      | Band (20kHz or less) |       | Band (40kHz or less) |       | Band (80kHz or less) |       |
|  | 16bit                | 24bit | 16bit                | 24bit | 16bit                | 24bit |
| Up to 1V   | 85dB                 | 87dB  | 84dB                 | 85dB  | 82dB                 | 82dB  |
| 1 - 20V  | 87dB                 | 98dB  | 87dB                 | 93dB  | 86dB                 | 91dB  |

DC/PA input amplifier distortion : 0.1% or less  
DC/PA input amplifier crosstalk : -80dB  
Noise level compared to 100% of the given input range  
Signal leakage level from other channels compared to 100% of the given input range.

| Analog signal output channels                                |  |                     |                     |
|--|--|---------------------|---------------------|
| Number of output channels                                    | 16   |                     |                     |
| Output connectors  | BNC (Z=50Ω type)   |                     |                     |
| Output format  | Unbalanced   |                     |                     |
| Output impedance   | 50Ω±10%  |                     |                     |
| Output range setting   | ±1 to ±5V selectable in 0.1V increments  |                     |                     |
| Maximum output current                                       | ±10mA(into 20Ω load)   |                     |                     |
| Quantization bit depth                                       | 24-bit or 16-bit switchable  |                     |                     |
| Digital-analog conversion                                    | ΔΣ method with 24-bit, 128x oversampling   |                     |                     |
| Output frequency flatness characteristics                    | (10V or less input range)<br>Band (20kHz or less) : ±0.5dB or less<br>Band (40kHz or less) : +0.5 to - 1.0 dB or less<br>Band (80kHz or less) : +0.5 to - 2.5 dB or less<br>(20V input range)<br>Band (20kHz or less) : +0.5 to - 1.0 dB or less<br>Band (40kHz or less) : +0.5 to - 1.5 dB or less<br>Band (80kHz or less) : +0.5 to - 3.0 dB or less |                     |                     |
| Output range precision                                       | ±2% or less  |                     |                     |
| Output nonlinearity  | ±0.1% or less  |                     |                     |
| Output distortion (THD)                                      | ±0.1% or less  |                     |                     |
| Output dynamic range (1V input range in 20kHz band or less)  | 24bit : 97dB<br>16bit : 89dB   |                     |                     |
| Signal to noise (SN) ration (1V input range)                 | Band(20kHz or less)  | Band(40kHz or less) | Band(80kHz or less) |
|  | 16bit 24bit  | 16bit 24bit         | 16bit 24bit         |
|  | 87dB 95dB  | 87dB 92dB           | 78dB 82dB           |
| Crosstalk between output channels (1V input range)           | -74dB or more  |                     |                     |
| Measured frequency of phase contrast between output channels | (10V or less input range)<br>Band (20kHz or less): 1.5° or less (in same expansion unit)<br>2° or less (in different expansion unit)<br>(20V input range)<br>Band (20kHz or less): 2° or less (in same expansion unit)<br>3° or less (in different expansion unit)<br>Band (80kHz or less): 3° or less   |                     |                     |

| AR-WXIRGPS   |  |
|--|--|
| connectors (IRIG)  | BNC : The terminal for acquiring the signal from IRIG-B126 IRIG-B120-B123  |
| connectors (GPS)   | Dsub9Pin (male) : The terminal for acquiring the signal from NMEA0183<br>WX-7000 clock can be adjusted using the time information acquired by IRIG and GPS.<br>Possible to record the data (time record that provided by GPS or IRIG-B126,IRIG-B120-B123) to the measurement channel by original format. An applicable channel (CH1) is occupied by the original format data. The signal is outputted during playback. |
| Recording of time information / Playback of time information | Possible to record GPS information.<br>Possible to select as follows two items.<br>1.Recording location information to measurement channels<br>2.Not recording location information to measurement channels  |



WX-7016

The WX-7000 Series, a new Portable Instrumentation Data Recorder family of products, are designed to provide multi-channel high-bandwidth data recording solutions for testing and monitoring requirements in aerospace, defense, power generation, underwater research, rail transportation, automotive, heavy machinery, and acoustics/vibration-based industrial applications.

*Base model is WX-7016; 32, 64 and 128 channel models are available.*



16ch model WX-7016 32ch model WX-7032 64ch model WX-7064 128ch model WX-7128

### TEAC AMERICA, INC.

7733 Telegraph Road, Montebello, CA 90640  
Phone 323.727.4857 | Fax 323.869.8696  
Email [datarecorder@teac.com](mailto:datarecorder@teac.com)  
<http://teac-ipd.com/data-recorders/>

Copyright© 2013 TEAC CORPORATION. All rights reserved.

Other company names and product names in this document are the trademarks or registered trademarks of their respective owners.  
Features and specifications are subject to change without notice.  
Precaution : To ensure safe handling and operation, read the Instruction Manual before use.

TEAC Data Recorder Products Distributed by:

#### Tritek Inc.

PO Box 357, Hamilton, MA 01936 Phone 978.468.4135 Fax 978.468.4171  
Email: [info@tritekdatasystems.com](mailto:info@tritekdatasystems.com)

# High-speed, Multi-channel and Long recording time in comparison to AIT tape data recorders.


WX-7000 series from TEAC provide reliable data recording with protection from catastrophic data loss



128ch model  
WX-7128

## Wide Dynamic Range and High Resolution

Wide dynamic range and high resolution provide extended head-room input range to record transient phenomenon. 24 bit analog to digital conversion provides high-resolution measurement, avoiding low level data buried in noise.

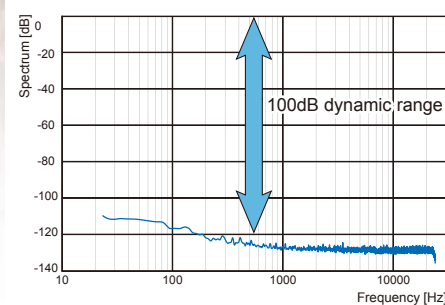

## Extended Recording Time

With the use of 500GB RDX media, WX-7000 records 36 times longer than AIT data recorder. There is no need to change media frequently to record long term test data.

## TEDS (Transducer Electronic Data Sheet) support

TEDS function recognizes sensitivity information from transducers electronically, reducing set-up time and eliminating cabling errors.

## Reliable Recording Media

WX-7000 unit and recording media (RDX, SDHC) are rugged and reliable.

SDHC card has no moving part and is shockproof media.

RDX is a disk-based (HDD/SSD) storage system with removable cartridges which offers rugged, reliable and convenient data storage.

RDX cartridge is shockproof which against 1m (39.4") drop to tile over concrete floor.



## User-friendly, Intuitive Operation


3.5 inch LCD is provided on front panel, for user-friendly operation. Recorder settings are shown on the display.

It's easy to monitor and change main parameters on home screen, with easy to access additional set-up menu pages.



## Fail-safe Recording

WX-7000 closes the data file after every one minute while recording. Even if an unexpected or mistaken power outage happens during recording, all recorded data from one minute before power loss is saved and is available for review and replay.

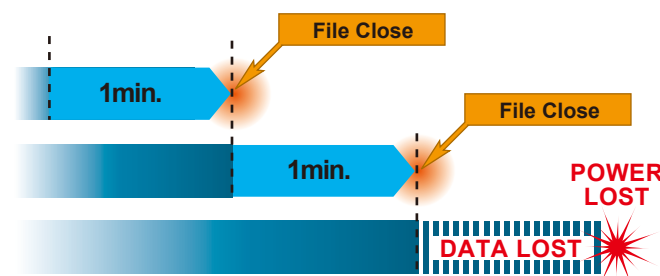

## Software Support

(Commercial product)

OPTION

### WX Navi Control and Viewing Software for WX-7000

3.5 inch LCD is provided on front panel, for user-friendly operation. Recorder settings are shown on the display. It's easy to monitor and change main parameters on home screen, with easy to access additional set-up menu pages.



### Control API


Control API is provided as a Windows DLL (Dynamic-Link Library) which can be linked from an upper program. Control, Settings, Real-time Transferring Data, Downloading Recorded Data File are available using this Control API. Data analysis software developer, system integrator can use this Control API in order to add these functions to their existing system.

### TAFFmat (TEAC data Acquisition File Format) Data File

TAFFmat is widely supported by major data analysis software. Recorded data file by WX-7000 can be analyzed using data analysis software which is currently used.

| Category     | Software         | Note                        |
|--------------|------------------|-----------------------------|
| General      | DADISP           |                             |
|              | FlexPro          |                             |
|              | DIAdem           |                             |
|              | FAMOS            |                             |
|              | Matlab           | Script file can be provided |
| NVH          | LMS Test.Lab     |                             |
|              | B&K PULSE        | 16 bit only                 |
| Turbine Test | EDAS             |                             |
|              | SIGNAL Workbench |                             |

### General analysis software (Commercial product)

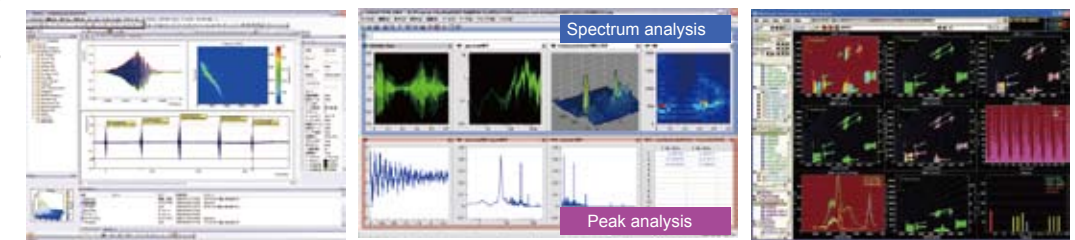

FlexPro9  
Developed by Weisang GmbH

DADISP 6.5  
Developed by DSP Development Corporation



### Sampling frequencies and bands

| Series 1 |           | Series 2 |           | Series 3 |           | Series 4 |           |
|----------|-----------|----------|-----------|----------|-----------|----------|-----------|
| Fs(kHz)  | Band(kHz) | Fs(kHz)  | Band(kHz) | Fs(kHz)  | Band(kHz) | Fs(kHz)  | Band(kHz) |
| 192.00   | 80.00     | 200.00   | 83.33     | 204.80   | 85.33     | 131.07   | 54.61     |
| 96.00    | 40.00     | 100.00   | 41.67     | 102.40   | 42.67     | 65.54    | 27.31     |
| 48.00    | 20.00     | 50.00    | 20.83     | 51.20    | 21.33     | 32.77    | 13.65     |
| 24.00    | 10.00     | 20.00    | 8.33      | 25.60    | 10.67     | 16.38    | 6.83      |
| 12.00    | 5.00      | 10.00    | 4.17      | 12.80    | 5.33      | 8.19     | 3.41      |
| 6.00     | 2.50      | 5.00     | 2.08      | 6.40     | 2.67      | 4.10     | 1.71      |
| 3.00     | 1.25      | 2.00     | 0.83      | 3.20     | 1.33      | 2.05     | 0.85      |
| 1.50     | 0.63      | 1.00     | 0.42      | 1.60     | 0.67      | 1.02     | 0.43      |

Sampling frequencies and bands Sampling frequency (Fs)/2.4 = band

| Series 1                                      | Series 2                           | Series 3   | Series 4   |
|---|------------------------------------|--|--|
| Corresponds to DAT/audio sampling frequencies | Corresponds to integer frequencies | Frequency axis during 2N FFT analysis : integrated in resolution | Frequency axis during 2N FFT analysis : integrated in resolution |

### Number of channels that can be recorded simultaneously

| Fs (kHz) |          |          |          | RDX recording 6MB/s |       | SDHC recording 1.5MB/s |       |
|----------|----------|----------|----------|---------------------|-------|------------------------|-------|
| Series 1 | Series 2 | Series 3 | Series 4 | 16bit               | 24bit | 16bit                  | 24bit |
| 192.00   | 200.00   | 204.80   | 131.07   | 16ch                | 8ch   | -                      | -     |
| 96.00    | 100.00   | 102.40   | 65.54    | 32ch                | 16ch  | 8ch                    | -     |
| 48.00    | 50.00    | 51.20    | 32.77    | 64ch                | 32ch  | 16ch                   | 8ch   |
| 24.00    | 20.00    | 25.60    | 16.38    | 128ch               | 64ch  | 32ch                   | 16ch  |
| 12.00    | 10.00    | 12.80    | 8.19     | 128ch               | 128ch | 64ch                   | 32ch  |
| 6.00     | 5.00     | 6.40     | 4.10     | 128ch               | 128ch | 128ch                  | 64ch  |
| 3.00     | 2.00     | 3.20     | 2.05     | 128ch               | 128ch | 128ch                  | 128ch |
| 1.50     | 1.00     | 1.60     | 1.02     | 128ch               | 128ch | 128ch                  | 128ch |

## Recording times

The following tables show approximate recording times for different media capacities according to the combination of sampling frequency, recording bit depth and recording media.

Approximate total recording times for a 1TB RDX HDD (in days, hours:minutes:seconds)

| Fs(kHz) | Band(kHz) | 16-bit             |                    |                    |                    |                    | 24-bit             |                    |                    |                    |                    |
|---------|-----------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
|         |           | 8ch                | 16ch               | 32ch               | 64ch               | 128ch              | 8ch                | 16ch               | 32ch               | 64ch               | 128ch              |
| 192.00  | 80.00     | 3 days, 18:10:58   | 1 day, 21:09:00    | 1 day, 21:09:00    | 1 day, 21:09:00    | 1 day, 21:09:00    | 1 day, 21:09:00    | 1 day, 21:09:00    | 1 day, 21:09:00    | 1 day, 21:09:00    | 1 day, 21:09:00    |
| 96.00   | 40.00     | 7 days, 11:53:54   | 3 days, 18:10:58   | 3 days, 18:10:58   | 3 days, 18:10:58   | 3 days, 18:10:58   | 3 days, 18:10:58   | 3 days, 18:10:58   | 3 days, 18:10:58   | 3 days, 18:10:58   | 3 days, 18:10:58   |
| 48.00   | 20.00     | 14 days, 21:56:32  | 7 days, 11:53:54   | 7 days, 11:53:54   | 7 days, 11:53:54   | 7 days, 11:53:54   | 7 days, 11:53:54   | 7 days, 11:53:54   | 7 days, 11:53:54   | 7 days, 11:53:54   | 7 days, 11:53:54   |
| 24.00   | 10.00     | 29 days, 12:34:47  | 14 days, 21:56:32  | 14 days, 21:56:32  | 14 days, 21:56:32  | 14 days, 21:56:32  | 14 days, 21:56:32  | 14 days, 21:56:32  | 14 days, 21:56:32  | 14 days, 21:56:32  | 14 days, 21:56:32  |
| 12.00   | 5.00      | 57 days, 20:48:58  | 29 days, 12:34:47  | 29 days, 12:34:47  | 29 days, 12:34:47  | 29 days, 12:34:47  | 29 days, 12:34:47  | 29 days, 12:34:47  | 29 days, 12:34:47  | 29 days, 12:34:47  | 29 days, 12:34:47  |
| 6.00    | 2.50      | 111 days, 6:48:00  | 57 days, 20:48:58  | 57 days, 20:48:58  | 57 days, 20:48:58  | 57 days, 20:48:58  | 57 days, 20:48:58  | 57 days, 20:48:58  | 57 days, 20:48:58  | 57 days, 20:48:58  | 57 days, 20:48:58  |
| 3.00    | 1.25      | 206 days, 16:03:27 | 111 days, 6:48:00  | 111 days, 6:48:00  | 111 days, 6:48:00  | 111 days, 6:48:00  | 111 days, 6:48:00  | 111 days, 6:48:00  | 111 days, 6:48:00  | 111 days, 6:48:00  | 111 days, 6:48:00  |
| 1.50    | 0.63      | 361 days, 16:06:02 | 206 days, 16:03:27 | 206 days, 16:03:27 | 206 days, 16:03:27 | 206 days, 16:03:27 | 206 days, 16:03:27 | 206 days, 16:03:27 | 206 days, 16:03:27 | 206 days, 16:03:27 | 206 days, 16:03:27 |

Approximate total recording times for a 32GB SDHC (in days, hours:minutes:seconds)

| Fs(kHz) | Band(kHz) | 16-bit            |                  |                  |                 |          | 24-bit           |                  |                 |          |          |
|---------|-----------|-------------------|------------------|------------------|-----------------|----------|------------------|------------------|-----------------|----------|----------|
|         |           | 8ch               | 16ch             | 32ch             | 64ch            | 128ch    | 8ch              | 16ch             | 32ch            | 64ch     | 128ch    |
| 192.00  | 80.00     |                   |                  |                  |                 |          |                  |                  |                 |          |          |
| 96.00   | 40.00     | 5:44:51           |                  |                  |                 |          |                  |                  |                 |          |          |
| 48.00   | 20.00     | 11:26:10          | 5:44:51          |                  |                 |          |                  |                  |                 |          |          |
| 24.00   | 10.00     | 22:38:19          | 11:26:10         | 5:44:51          |                 |          |                  |                  |                 |          |          |
| 12.00   | 5.00      | 1 day, 20:22:18   | 22:38:19         | 11:26:10         | 5:44:51         |          |                  |                  |                 |          |          |
| 6.00    | 2.50      | 3 days, 13:19:48  | 1 day, 20:22:18  | 22:38:19         | 11:26:10        | 5:44:51  | 1 day, 20:22:18  | 22:38:19         | 11:26:10        | 5:44:51  |          |
| 3.00    | 1.25      | 6 days, 14:28:12  | 3 days, 13:19:48 | 1 day, 20:22:18  | 22:38:19        | 11:26:10 | 3 days, 13:19:48 | 1 day, 20:22:18  | 22:38:19        | 11:26:10 | 5:44:51  |
| 1.50    | 0.63      | 11 days, 13:19:22 | 6 days, 14:28:12 | 3 days, 13:19:48 | 1 day, 20:22:18 | 22:38:19 | 6 days, 14:28:12 | 3 days, 13:19:48 | 1 day, 20:22:18 | 22:38:19 | 11:26:10 |